




The *AcoustaScape AS41 System* brings stunning surround sound to the backyard with four 4" camouflage enclosed two-way satellite speakers and a bass-boosting 8" in-ground subwoofer. The AS41 System projects perfectly even sound coverage directly into the listening area with equal volume, turning the whole outdoor space into a sweet spot without causing a disturbance to neighbors... All while remaining completely hidden from sight in landscape foliage. Expand the system with up to four AS4SAT speakers for coverage up to 2,500 square feet*.

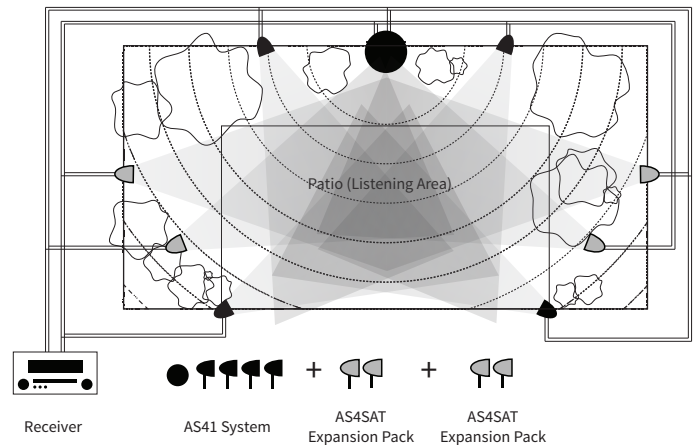

AS41

Hi-Fi Landscape Audio System

MSRP: \$1,700/ea

- 4 Satellite Speakers + 1 In-Ground Subwoofer
- 8 Ohm Impedance Matched System
- Perfectly even coverage up to 2,500 square feet




AS4SAT

Speaker Expansion Pack

MSRP: \$400/pair

- 2 Satellite Speakers
- 70° dispersion with an optimum listening area 8'-20'
- Non-corrosive sealed enclosures



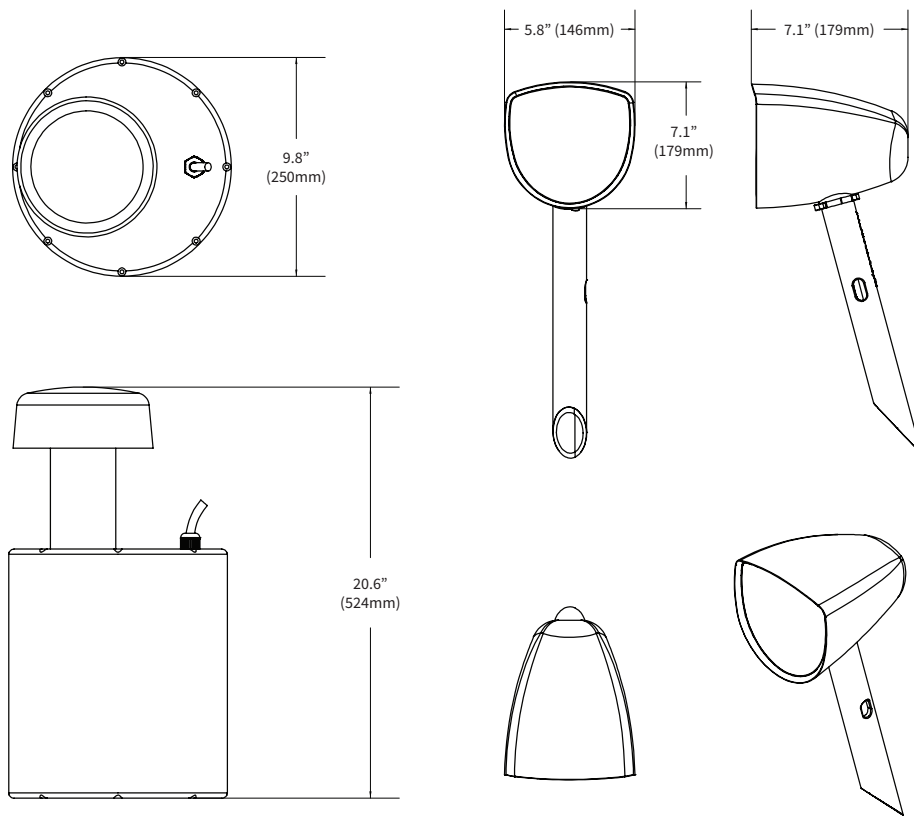

Acoustascape AS41 System Specifications

| | |
|----------------------------|---|
| A4SAT (Quantity 4): | 4.5" (114mm) IMP cone satellites with rubber surround and a 0.75" PEI dome tweeter |
| A4SAT Dimensions: | 126mm x 180mm |
| A8SUB (Quantity 1): | 8" (400mm) Dual Voice Coil, IMP subwoofer with rubber surround and weatherproof aluminum mushroom head |
| A8SUB Dimensions: | 250mm x 524mm |
| System Impedance: | 8 ohms per channel nominal |
| Frequency Response: | 32Hz-20,000kHz +/- 3dB |
| Crossover Frequency: | 100Hz |
| Power Handling: | 50watts - 200watts |
| Sensitivity: | 87dB |
| Satellite Dispersion: | 70° dispersion with an optimum listening area 8'-20' (2.4-6.1 meters) from the listening area |
| Placement Recommendations: | Satellites- 6'-8' (1.8-2.4 meters) apart along perimeter of listening area Woofer- The center of the 8 satellites |
| Enclosure Material: | Satellites- Non-corrosive sealed enclosures Woofer- (HDPE) non-corrosive sealed enclosure |
| Included Accessories: | Eight 7" (177mm) ground stakes, 24 silicone filled wire nuts |
| Listening Area: | Up to 2,500 square feet (232 square meters)* |
| Wire Recommendations: | 14 gauge – up to 250 feet (80 meters) 2 conductor, direct burial 12 gauge – up to 400 feet (122 meters) 2 conductor, direct burial |

*Up to 2,500 square feet with the additional use of two AS4SAT Expansion Packs

**Direct burial speaker wire required (Sold Separately)